




High-Pressure Hose A0560 (1600 bar)

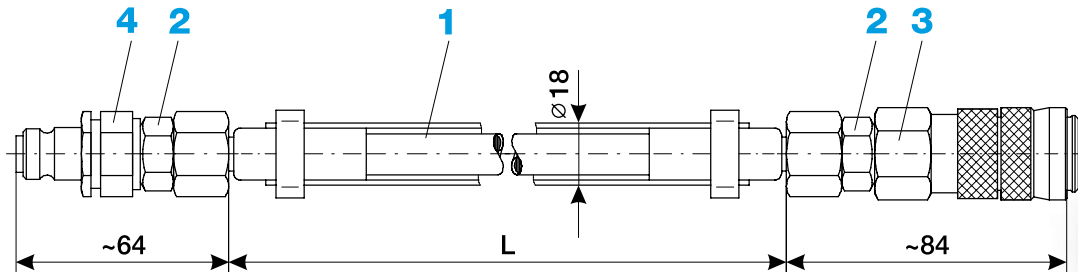

Lengths available from stock

for pre-assembled, oil-filled and pressure-tested high-pressure hose

Art. No.	Designation
A056000.22	High-pressure hose 0.220 m long
A056000.27	High-pressure hose 0.270 m long
A056000.34	High-pressure hose 0.340 m long
A056000.5	High-pressure hose 0.5 m long
A056000.55	High-pressure hose 0.550 m long
A056000.557	High-pressure hose 0.557 m long
A056000.6	High-pressure hose 0.6 m long
A05600001	High-pressure hose 1.0 m long
A05600001.5	High-pressure hose 1.5 m long
A05600001.7	High-pressure hose 1.7 m long
A05600001.8	High-pressure hose 1.8 m long
A05600002.1	High-pressure hose 2.1 m long

Art. No.	Designation
A05600002	High-pressure hose 2.0 m long
A05600003	High-pressure hose 3.0 m long
A05600004	High-pressure hose 4.0 m long
A05600005	High-pressure hose 5.0 m long
A05600006	High-pressure hose 6.0 m long
A05600007	High-pressure hose 7.0 m long
A05600008	High-pressure hose 8.0 m long
A05600009	High-pressure hose 9.0 m long
A05600010	High-pressure hose 10.0 m long
A05600015	High-pressure hose 15.0 m long
A05600020	High-pressure hose 20.0 m long

Other lengths are available at short notice upon request, as these are assembled by SCHAAF.

All items are available individually.

Item	Designation	Article No.
1	High-pressure hose A0580 ... m long	A0580...
2	Adapter G1/4" AG / M14x1.5 AG 60°	A05940000
3	Quick-release coupling sleeve CVK16-SV G1/4" IG	ZU0010559
4	Quick-release coupling nipple CVN16 G1/4" IG	ZU0010001

Hose specifications

All high-pressure hoses are fitted with an additional protective hose. The data printed on the high-pressure hose (applies only to Item 1 above):

-SCHAAF- 41812-ERKELENZ-GERMANY/EN/HDS1800/5/XQJJ/PN1800

EN Standard Quality Assurance
All high-pressure hoses are checked for material quality, dimensional accuracy, correct functioning and load-resistance. During order execution, they are subject to continuous quality assurance measures and are supplied together with detailed technical information.

Hose type
Nominal diameter

max. operating pressure in bar


e.g. 4Q05 (4th quarter 2005)



SCHAAF has been developing and manufacturing high-pressure hydraulic tools since 1954.



High-Pressure Hose A0560 (1600 bar)

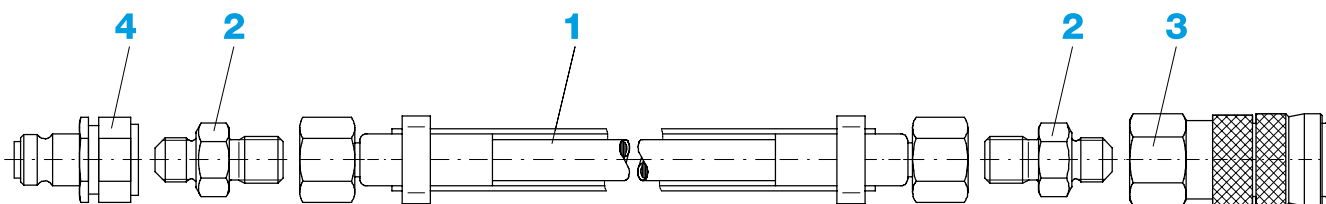

Caution!! High-Pressure Hydraulics

If leaks occur when pressure is being applied, always relieve the hydraulic pressure immediately and either seal the leak or replace the defective part.

Max. operating pressure for item 1:	1800 bar
Test pressure for item 1:	2700 bar
Bursting pressure for item 1:	4500 bar
Inner tube:	POM
Pressure jacket:	4 spiralled layers of corrosion-proof high tensile steel
Outer sheath:	PA, Nylon
Protective hose:	PVC
Inside diameter:	5.0 mm
Outside diameter:	11.6 mm
Outside diameter incl. protective hose:	18.0 mm
Weight:	0.29 kg/m
Items 3 and 4 are dimensioned for a max. operating pressure of 1600 bar.	

Caution!! Pressure must never be applied to the quick-release coupling nipple (item 4) if it is not connected!

The high-pressure hose and all pressure-carrying parts associated with it, must always be inspected for damage before pressure is applied. Damaged parts must immediately be replaced by new parts.

The quick-release coupling sleeve (item 3) has a safety sleeve that must be screwed down before each pressurisation!

It is only permitted to use hydraulic oils for transferring pressure. Other fluids may only be used with the express approval of SCHAAF. The high-pressure hose must never be subjected to mechanical stress or kinking. The minimum bending radius is 130 mm. The permissible ambient and contact temperature is between -40 °C and +100 °C. It is recommended to replace the high-pressure hose with a new hose, at the latest, every 5 years. Earlier replacement is recommended if the hose is subject to extreme conditions. The maximum cycles-to-failure count can be assumed to be 10,000. Dirt, contamination, mechanical damage and very high or low temperatures can reduce the cycles-to-failure count considerably. Contact us if you have any questions in this respect.

Fitting information: If the oil in the high-pressure hose is subject to excessive heating, the pressure can build up inside it, making it impossible to couple Items 3 or 4. If this is the case, a connection point must be loosened, e.g. between Items 1 and 2, so that the pressure inside the high-pressure hose can decrease. When the pressure has decreased, the loosened connection must be properly tightened.

Other products manufactured by SCHAAF

- Bolt tensioners
- Hydraulic nuts
- High-pressure hydraulic pumps:
manually operated, electrically or pneumatically driven
- Couplings, nipples, adapters, distributors up to 4000 bar
- ExpaTen, EcoRolls and many more

Complete solution from SCHAAF

The high-pressure hydraulic hoses, connection couplings and adapters are all aligned to function with SCHAAF high-pressure hydraulic tools and high-pressure hydraulic generators = 100% system solution.

www.schaaf-gmbh.com

Visit us on the internet and convince yourself of our innovative services and products.

SCHAAF has been developing and manufacturing high-pressure hydraulic tools since 1954.

