


ExpaBolt (Assembly)


Expa = Expansion = 100 % positive locking into the flange bore

- ➔ = High pressure hydraulic system with high pressure pump and high pressure hose
- ➔ = Pressure relief to tank
- ⬇ = Forces
- ➔ = Motion


1. Install bolt and attach positioning ring

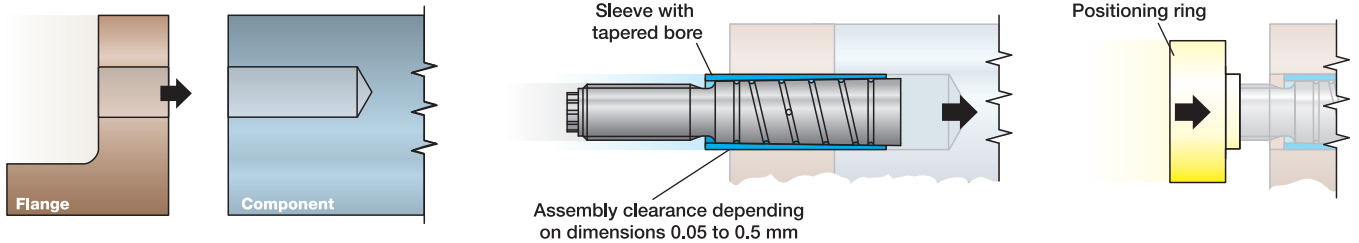


2. Screw on Bolt Tensioner (SSV) and complete clamped connection

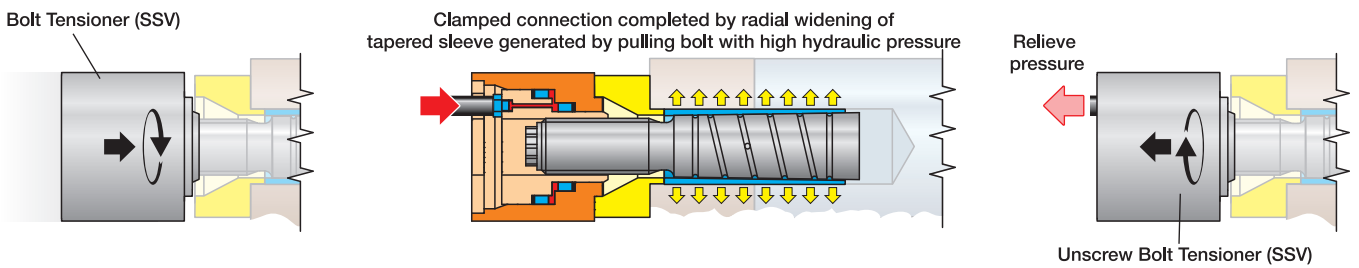


3. Attach protection cap

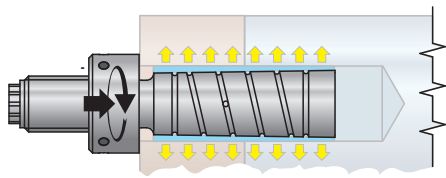

(Disassembly)

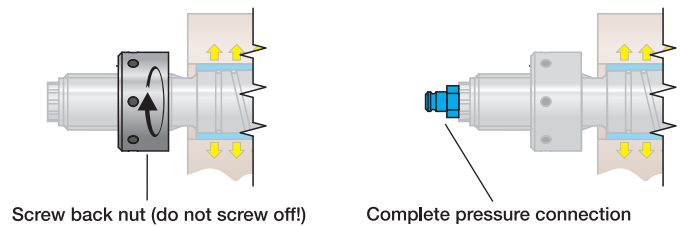

4. Relieve clamped connection

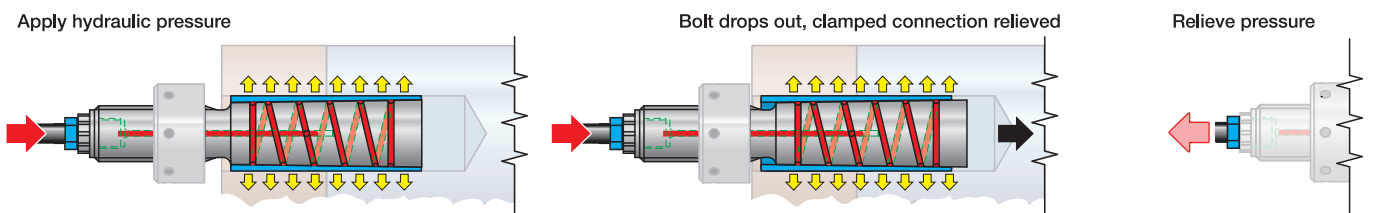

5. Disassemble ExpaBolt



Animated form is available at www.schaaf-gmbh.com or on SCHAAF interactive CD.

