


# GripLoc

Quick and wearless shaft and axle connection with removable Hydraulic Nut (HM)

↗ = Forces  
↘ = Movement

## Advantages of SCHAAF GripLoc when sliding on (exaggerated drawing)

SCHAAF GripLoc couplings are manufactured by default in a way, that a constant pressing over the complete shaft contact area is guaranteed and, thus, the safety is increased. Due to this procedure, combined with the used tempering steel, material tensions are reduced additionally.

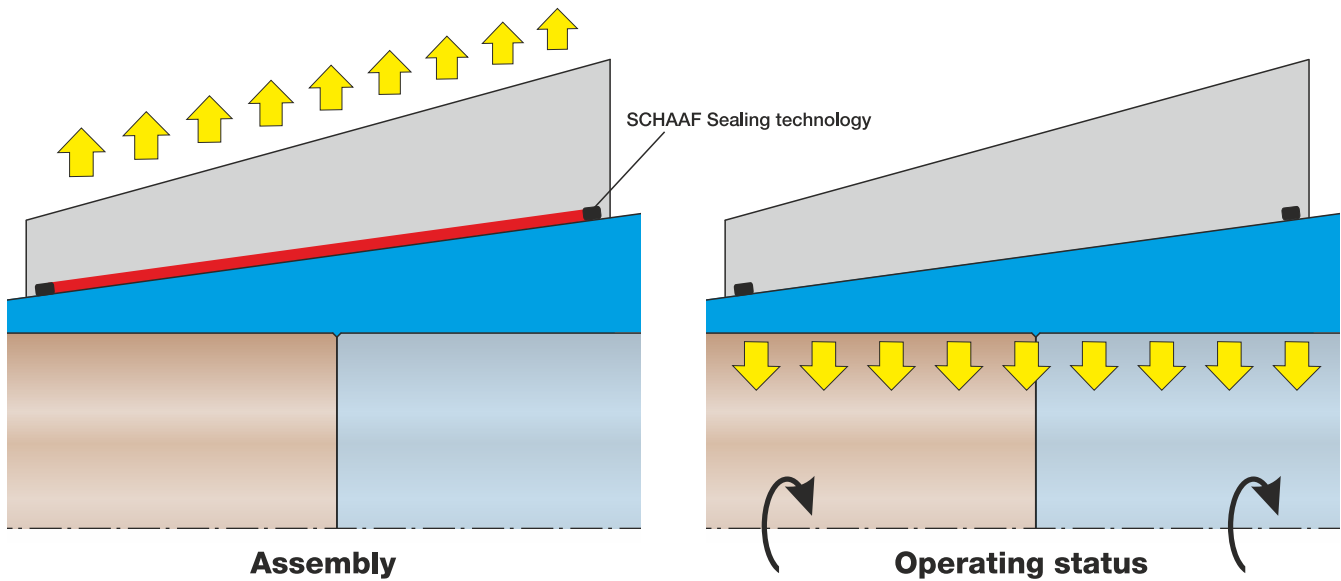

## Other shaft couplings available on the market

Shafts couplings, which are distributed on the global market are manufactured cylindrically on the outside, which leads to different clamping forces and, thus, to different torque transmission possibilities.

