




# Hydraulic High-Pressure Hoses

up to 2500 bar

**Caution:**

The high-pressure hose and all pressure-carrying parts associated with it, must always be inspected for damage before pressure is applied.

Damaged parts must immediately be replaced by new parts.

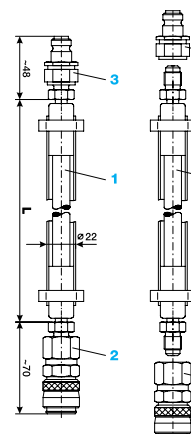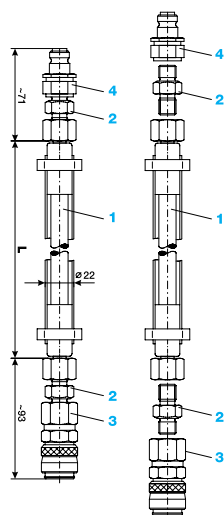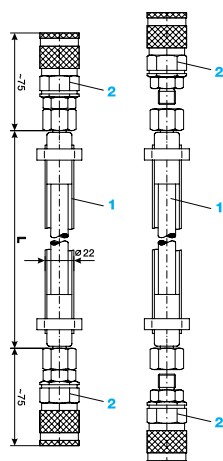

	A0554	A0654	A0692
<b>Connection 1:</b>	WVK4	CVN25-2	
<b>Connection 2:</b>	WVK4	CVK25-2	
<b>Item 2:</b>	Quick-release coupling sleeve WVK4 G1/4" AG/60°	Adapter G1/4" BSP 120° AG / G1/4" AG 60°	Quick-release coupling sleeve CVK25-2 G1/4" IG
<b>Item 3:</b>	--	Quick-release coupling sleeve CVK25-2 G1/4" IG	Quick-release coupling nipple CVN25-2 G1/4" IG
<b>Item 4:</b>	--	Quick-release coupling nipple CVN25-2 G1/4" IG	--
<b>Item 5:</b>	--	--	--
<b>Specialty:</b>	Item 2 is dimensioned for a max. operating pressure of 2500 bar.	Items 2, 3 and 4 are dimensioned for a max. operating pressure of 2500 bar.	Items 2 and 3 are dimensioned for a max. operating pressure of 2500 bar.
<b>Max. operating pres. for item 1:</b>	3000 bar		
<b>Test pressure for item 1:</b>	4650 bar		
<b>Bursting pressure for item 1:</b>	6200 bar		
<b>Inner tube:</b>	POM		
<b>Pressure jacket:</b>	6 spiralled layers of corrosion-proof high tensile steel		
<b>Outer sheath:</b>	PA, Nylon		
<b>Protective hose:</b>	PVC		
<b>Inside-Ø:</b>	5.0 mm		
<b>Outside-Ø:</b>	13.0 mm		
<b>Outside -Ø incl. protect. hose:</b>	22.0 mm		
<b>Weight:</b>	0.43 kg/m		
<b>Minimum bending radius:</b>	175 mm		
<b>Max. cycles-to-failure count:</b>	10,000		
<b>Ambient temperature:</b>	-40 °C to +100 °C		

Other lengths are available at short notice upon request, as these are assembled by SCHAAF.



All items are available individually.

**www.schaaf-gmbh.com**

Visit us on the internet and convince yourself of our innovative services and products.

**SCHAAF has been developing and manufacturing high-pressure hydraulic tools since 1954.**







# Hydraulic High-Pressure Hoses

up to 2500 bar

**Caution:**

The high-pressure hose and all pressure-carrying parts associated with it, must always be inspected for damage before pressure is applied.

Damaged parts must immediately be replaced by new parts.

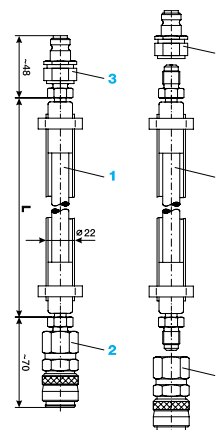

	A0695	A0696
<b>Connection 1:</b>	G1/4"	CVN25-2
<b>Connection 2:</b>	G1/4"	CVK25-2
<b>Item 2:</b>	--	Quick-release coupling sleeve CVK25-2 G1/4" IG
<b>Item 3:</b>	--	Quick-release coupling nipple CVN25-2 G1/4" IG
<b>Item 4:</b>	--	--
<b>Item 5:</b>	--	--
<b>Specialty:</b>	--	Items 2 and 3 are dimensioned for a max. operating pressure of 2500 bar.
<b>Max. operating pres. for item 1:</b>	3000 bar	
<b>Test pressure for item 1:</b>	4650 bar	
<b>Bursting pressure for item 1:</b>	6200 bar	
<b>Inner tube:</b>	POM	
<b>Pressure jacket:</b>	6 spiralled layers of corrosion-proof high tensile steel	
<b>Outer sheath:</b>	PA, Nylon	
<b>Protective hose:</b>	PVC	
<b>Inside-Ø:</b>	5.0 mm	
<b>Outside-Ø:</b>	13.0 mm	
<b>Outside -Ø incl. protect. hose:</b>	22.0 mm	
<b>Weight:</b>	0.43 kg/m	
<b>Minimum bending radius:</b>	175 mm	
<b>Max. cycles-to-failure count:</b>	10,000	
<b>Ambient temperature:</b>	-40 °C to +100 °C	

Other lengths are available at short notice upon request, as these are assembled by SCHAAF.

All items are available individually.

**www.schaaf-gmbh.com**

Visit us on the internet and convince yourself of our innovative services and products.

**SCHAAF has been developing and manufacturing high-pressure hydraulic tools since 1954.**

